

(19)



(11)

EP 2 554 787 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.02.2018 Bulletin 2018/08

(51) Int Cl.:
E21B 43/12 (2006.01)

(21) Application number: **12179046.3**

(22) Date of filing: **02.08.2012**

(54) **Gas lift valve having edge-welded bellows and captive sliding seal**

Gashubventil mit kantengeschweißten Bälgen und kaptiver Gleitdichtung

Soupape d'extraction de gaz dotée de soufflets soudés aux bords et joint coulissant captif

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **04.08.2011 US 201113198468**

(43) Date of publication of application:
06.02.2013 Bulletin 2013/06

(73) Proprietor: **Weatherford Technology Holdings,
LLC
Houston, TX 77056 (US)**

(72) Inventor: **Salihbegovic, Zlatko
New Iberia, LA Louisiana 70563 (US)**

(74) Representative: **Murray, David Craig
Marks & Clerk LLP
Aurora
120 Bothwell Street
Glasgow G2 7JS (GB)**

(56) References cited:
**US-A- 2 725 014 US-A- 3 592 561
US-A- 5 421 241 US-A1- 2004 182 437
US-A1- 2007 227 739 US-A1- 2011 067 879**

EP 2 554 787 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

[0001] To obtain hydrocarbon fluids from an earth formation, a wellbore is drilled into an area of interest within a formation. The wellbore may then be "completed" by inserting casing in the wellbore and setting the casing using cement. Alternatively, the wellbore may remain uncased as an "open hole", or it may be only partially cased. Regardless of the form of the wellbore, production tubing is run into the wellbore to convey production fluid (e.g., hydrocarbon fluid, which may also include water) to the surface.

[0002] Often, pressure within the wellbore is insufficient to cause the production fluid to naturally rise through the production tubing to the surface. In these cases, an artificial lift system can be used to carry the production fluid to the surface. One type of artificial lift system is a gas lift system, of which there are two primary: tubing-retrievable gas lift systems and wireline-retrievable gas lift systems. Each type of gas lift system uses several gas lift valves spaced along the production tubing. The gas lift valves allow gas to flow from the annulus into the production tubing so the gas can lift production fluid in the production tubing. Yet, the gas lift valves prevent fluid to flow from the production tubing into the annulus.

[0003] A typical wireline-retrievable gas lift system 10 is shown in Figure 1. Operators inject compressed gas G into the annulus 22 between a production tubing string 20 and the casing 24 within a cased wellbore 26. A valve system 12 supplies the injection gas G from the surface and allows produced fluid to exit the gas lift system 10.

[0004] Side pocket mandrels 30 spaced along the production string 20 hold gas lift valves 40 within side pockets 32. As noted previously, the gas lift valves 40 are one-way valves that allow gas flow from the annulus 22 into the production string 20 and to prevent gas flow from the production string 20 into the annulus 22.

[0005] A production packer 14 located on the production string 20 forces the flow of production fluid P from a formation up through the production string 20 instead of up through the annulus 22. Additionally, the production packer 14 forces the gas flow from the annulus 22 into the production string 20 through the gas lift valves 40.

[0006] In operation, the production fluid P flows from the formation into the wellbore 26 through casing perforations 28 and then flows into the production tubing string 20. When it is desired to lift the production fluid P, compressed gas G is introduced into the annulus 22, and the gas G enters from the annulus 22 through ports 34 in the mandrel's side pockets 32. Disposed inside the side pockets 32, the gas lift valves 40 control the flow of injected gas I into the production string 20. As the injected gas I rises to the surface, it helps to lift the production fluid P up the production string 20 to the surface.

[0007] Gas lift valves 40 have been used for many years to inject compressed gas into oil and gas wells to

assist in the production to the surface. The valves 40 use metal bellows to convert pressure into movement. Injected gas acts on the bellows to open the valve 40, and the gas passes through a valve mechanism into the tubing string. As differential pressure is reduced on the bellows, the valve 40 can close.

[0008] Two types of gas lift valves 40 use bellows. One type uses a non-gas charged, atmospheric bellows and requires a spring to close the valve mechanism. The other type of valve 40 uses an internal gas charge, usually nitrogen, in a volume dome to provide a closing force on the bellows. In both valve configurations, pressure differential on the bellows from injected high-pressure gas opens the valve mechanism. In the case of a valve having the non-gas charged bellows, the atmospheric bellows is subjected to high differential pressures when the valve 40 is installed in a well and can be exposed to high operating gas injection pressure. By contrast, a valve having the gas-charged bellows is subject to high internal bellows pressure during setting and prior to installation. Yet, once the gas-charged valve is installed, the differential pressure across the bellows is less than in the non-gas charged bellows during operation of the valve.

[0009] Prior art gas lift valves 40a-b having gas-charged bellows are shown in Figures 2A-2B. Each of the gas lift valves 40a-b has upper and lower seals 44a-b separating a valve port 46, which is in communication with injection gas ports 48. A valve piston 52 is biased closed by a gas charge dome 50 and a bellows assembly (*i.e.*, convoluted bellows 56 in Fig. 2A or edge-welded bellows system 57 in Fig. 2B). At its distal end, the valve piston 52 moves relative to a valve seat 54 at the valve port 46 in response to pressure on the bellows 56 from the gas charge dome 50. A predetermined gas charge is applied to the dome 50 and bellows assembly (*i.e.*, 56 or 57) biases the valve piston 52 against the valve seat 54 and close the valve port 46.

[0010] A check valve 58 in the gas-lift valves 40 is positioned downstream from the valve piston 52, valve seat 54, and valve port 46. The check valve 58 keeps flow from the production string (not shown) from going through the injection ports 48 and back into the casing (annulus) through the valve port 46. Yet, the check valve 58 allows injected gas from the valve port 46 to pass out the gas injection ports 48.

[0011] The bellows 56 on the valve 40a in Figure 2A is a convoluted bellows. Although a spring-activated gas lift valve may be available for standard sizes and capable of higher pressures, such a bellows-activated gas lift valve 40a with a convoluted bellows is not available for standard sizes of 1" (25.4mm) and 1.5" (38.1 mm), while being capable of operating pressures higher than 2000-2500 PSI (13.8MPa-17.2MPa) range. Instead, existing gas lift valves 40a using convoluted bellows are rated to a maximum operating injection pressure of 2000-2500 PSI (13.8MPa-17.2MPa).

[0012] As a result, such a valve 40a is not capable of reaching high operating pressures. If exposed to higher

pressures, the valve's convoluted bellows 56 would fail. For example, the bellows 56 may snake by forming a wave when exposed to high differential internal pressure, or the bellows 56 may split the convolutions by flattening when exposed to high external pressures. Finally, rapid pressure changes can contract and expand the bellows until the bellow's material fails due to fatigue.

[0013] Although a working pressure no higher than 2000-25000 PSI (13.8MPa-17.2MPa) may be acceptable in some application, operators want to use gas lift system in higher working pressure of up to 5000-6000 PSI (34.5MPa-41.4MPa), for example. Unfortunately, high differential pressure across a bellows during operation reduces its cycle life. Therefore, existing gas lift valves and bellows are not designed to operate with set pressures or in operating pressures in excess of 2000 PSI (13.8MPa) without severe failure risks.

[0014] As one exception, the XLift gas lift valve available from Schlumberger has a bellows system for operating at high pressures. An example of this bellows system 57 is shown on the gas lift valve 40b of Figure 2B. The edge-welded bellows system 57 is similar to that disclosed in U.S. Pat. No. 5,662,335. As shown, two sets 60a-b of dual bellows each include a seal bellows 62 and a counter bellows 64. The counter bellows 64 equalizes pressure exerted on the seal bellows 62 by delivering pressure of the injection gas to the oil in the system.

[0015] During operation, the valve piston 52 with its tungsten carbide ball on its distal end contacts the venturi seat 54, which acts as a positive stop for the gas lift valve 40b. None of the bellows 62, 64 of the bellows system 57 fully compresses. In the end, the arrangement of multiple bellows 62, 64 in the two sets 60a-b allow the gas lift valve to operate at higher pressures. Due to the requirements of the bellows system 57, however, the gas lift valve 40b must at least have a nominal size of 1.75-in (44.45mm). This requires the gas lift valve 40b to be used in a larger, custom designed gas lift mandrel, namely the XLG side pocket mandrel available from Schlumberger. Additionally, the complexity of the bellows system 57 has obvious disadvantages in the construction and operation of the gas lift valve 40b.

[0016] US 5,421,241 describes a bellows construction which defines multiple convolutions along the length thereof and having the ends of the bellows connected to respective fixed and moveable components by means of high temperature solder or weld metal. To protect the bellows against damage by overpressure, back-up rings are positioned in each of the inwardly and outwardly facing convolutions of the bellows structure. Back-up rings in the heat affected zones at the end portions of the bellows are composed of metal so that they will not become deteriorated by application of heat. Internal back-up rings in the central, non-heat affected zone of the bellows may be composed of a polymer material. All of the back-up rings of the externally facing convolutions of the bellows may be composed of polymer materials since they can be assembled within the respective convolutions.

[0017] The subject matter of the present disclosure is directed to overcoming, or at least reducing the effects of, one or more of the problems set forth above.

SUMMARY

[0018] According to a first arrangement, there is provided a gas lift apparatus. The apparatus may comprise a housing having a chamber, an inlet, and an outlet and a first seat disposed between the inlet and the outlet. The apparatus may comprise a piston movably disposed in the housing, the piston having a proximal end exposed to chamber pressure and a distal end exposed to inlet pressure, the distal end sliding relative to the first seat and selectively sealing fluid communication through the first seat. The apparatus may comprise a first edge-welded bellows disposed on the piston and separating the inlet pressure from the chamber pressure, the first edge-welded bellows fully compressing to a stacked height at a point when the distal end seals fluid communication through the first seat.

[0019] The first edge-welded bellows fully compressed to the stacked height may stop the sliding of the distal end relative to the first seat.

[0020] The apparatus may further comprise a check valve disposed in the housing, the check valve permitting fluid communication from the inlet to the outlet and restricting fluid communication from the outlet to the inlet.

[0021] The first seat may comprise an internal surface, and the distal end of the piston may comprise a seal disposed on an external surface of the distal end, the seal biased transversely to an axis of the piston and engaging the internal surface when disposed adjacent thereto.

[0022] The seal may comprise a sealing ring and a resilient ring disposed in a groove defined around the external surface, the resilient ring biasing the sealing ring away from the external surface.

[0023] The seal may comprise a spring-loaded cup seal having a lip biased away from the external surface.

[0024] The distal end may comprise an external surface, and the first seat may comprise a seal disposed on an internal surface, the seal biased transversely to an axis of the piston and engaging the external surface of the distal end when disposed adjacent thereto.

[0025] The seal may comprise a sealing ring and a resilient ring disposed in a groove defined around the internal surface, the resilient ring biasing the sealing ring away from the internal surface.

[0026] The seal may comprise a spring-loaded cup seal having a lip biased away from the internal surface.

[0027] The first edge-welded bellows may comprise a plurality of edge-welded diaphragms being stacked on top of one another when fully compressed in the stacked height.

[0028] The chamber may comprise an end wall having a shape corresponding to one of the edge-welded diaphragms and having one end of the first edge-welded

bellows affixed thereto; and the piston may comprise a shoulder having a shape corresponding to one of the edge-welded diaphragms and having one end of the first edge-welded bellows affixed thereto.

[0029] The apparatus may further comprise a second edge-welded bellows disposed on the piston and separating the inlet pressure from the chamber pressure, the second edge-welded bellows fully compressing to a stacked height when the distal end is distanced away from the first seat.

[0030] The piston may comprise an internal passage communicating a first interior of the first edge-welded bellows with a second interior of the second edge-welded bellows.

[0031] The first and second interiors may communicate a pressure differential between the inlet pressure and the chamber pressure via the internal passage.

[0032] An incompressible fluid may fill the first and second interiors and the internal passage.

[0033] According to a first aspect of the invention, there is provided a gas lift apparatus according to claim 1.

[0034] The apparatus may further comprise a check valve disposed in the housing, the check valve permitting fluid communication from the inlet to the outlet and restricting fluid communication from the outlet to the inlet.

[0035] The seal may be disposed on the external surface of the distal end, the seal biased transversely to the axis of the piston and engaging the internal surface of the housing when disposed adjacent thereto.

[0036] The seal may comprise a sealing ring and a resilient ring disposed in a groove defined around the external surface, the resilient ring biasing the sealing ring away from the external surface.

[0037] The seal may comprise a spring-loaded cup seal having a lip biased away from the external surface.

[0038] The seal may be disposed on the internal surface of the housing, the seal biased transversely to the axis of the piston and engaging the external surface of the distal end when disposed adjacent thereto.

[0039] The seal may comprise a sealing ring and a resilient ring disposed in a groove defined around the internal surface of the housing, the resilient ring biasing the sealing ring away from the internal surface.

[0040] The seal may comprise a spring-loaded cup seal having a lip biased away from the internal surface.

[0041] The at least one bellows may comprise a first edge-welded bellows fully compressing to a stacked height at a point when the seal seals fluid communication and stopping the movement of the piston in a first direction along the axis.

[0042] The first edge-welded bellows may comprise a plurality of edge-welded diaphragms being stacked on top of one another when fully compressed in the stacked height.

[0043] The chamber may comprise an end wall having a shape corresponding to one of the edge-welded diaphragms and having one end of the first edge-welded bellows affixed thereto; and the piston may comprise a

shoulder having a shape corresponding to one of the edge-welded diaphragms and having one end of the first edge-welded bellows affixed thereto.

[0044] The at least one bellows may comprise a second edge-welded bellows disposed on the piston and separating the inlet pressure from the chamber pressure, the second edge-welded bellows fully compressing to a stacked height when the external surface is distanced away from the internal surface and stopping the movement of the piston in a second direction along the axis.

[0045] The piston may comprise an internal passage communicating a first interior of the first edge-welded bellows with a second interior of the second edge-welded bellows.

[0046] The first and second interiors may communicate a pressure differential between the inlet pressure and the chamber pressure via the internal passage.

[0047] An incompressible fluid may fill the first and second interiors and the internal passage.

[0048] An apparatus for gas lift of production fluid in a production string has a gas lift valve that disposes in a mandrel downhole. The valve has a housing with a chamber, an inlet, and an outlet. A seat is disposed in the housing between the inlet and the outlet, and a piston is movably disposed in the housing relative to the seat for opening and closing the valve. The piston's proximal end is exposed to the chamber, while the piston's distal end can selectively seal with the seat to close fluid communication from the inlet to the outlet.

[0049] The seat and the piston's distal end can engage with a captive sliding seal during operation of the valve. In one arrangement, the seat is an inner cylindrical wall of the housing, and the piston's distal end has a captive sliding seal disposed thereabout that engages the wall when the distal end is inserted through the seat during closure of the valve. In another arrangement, the wall and seal configuration are reversed so that the piston's distal end has an external surface that engages a captive sliding seal on the housing when moved relative thereto. Different types of captive sliding seals can be used, having elastomeric biasing elements or spring-loaded biasing elements.

[0050] To control movement of the piston, an edge-welded bellows is disposed on the piston and separates inlet pressure at the inlet from chamber pressure at the chamber. The first edge-welded bellows fully compresses to a stacked height when the piston's distal end seals with the seat. In this way, the stacked edge-welded bellows stops movement of the piston's distal end inside the seat so there is no need for a mechanical stop to limit the piston's movement as conventionally required. Consequently, a more dynamic seal can be achieved at closing as noted above.

[0051] Another edge-welded bellows can also be disposed on the piston and can separate the inlet pressure from the chamber pressure. For example, the two bellows can have interiors communicating with one another via an internal passage in the piston. The two bellows oper-

ate in tandem with one extending when the other contracts and vice versa. An incompressible fluid, such as silicon oil, fills the interiors and the passage and can move from one bellows to the other to transfer the pressure differential between the inlet pressure and the chamber pressure. In contrast to the first bellows, this second bellows fully compresses to a stacked height when the distal end is distanced away from with the seat. This stops movement of the distal end away from the seat during opening and stops further extension of the first bellows.

[0052] The foregoing summary is not intended to summarize each potential embodiment or every aspect of the present disclosure. It should be understood that the features defined above in accordance with any aspect or below in relation to any specific embodiment may be utilized, either alone or in combination, with any other defined feature, in any other aspect or embodiment. The present invention is defined by the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0053]

Fig. 1 illustrates a gas lift system.

Figs. 2A-2B illustrate gas lift valves according to the prior art.

Fig. 3 illustrates a cross-section of a gas lift valve according to the present disclosure having a single edge-welded bellows.

Fig. 4 shows an edge-welded bellows according to the present disclosure.

Figs. 5A-5C shows the edge-welded bellows in three states.

Figs. 6A-6B illustrates portion of the gas lift valve, showing the valve member in stages of sealing.

Fig. 7A illustrates portion of the gas lift valve, showing a reverse sealing arrangement than that shown in Figures 6A-6B.

Fig. 7B illustrates portion of the gas lift valve, showing another sealing arrangement having a spring-loaded cup seal.

Fig. 7C is a detailed view of a spring-loaded cup seal having a lip biased transversely to the valve's axis.

Fig. 8 illustrates a cross-section of a gas lift valve according to the present disclosure having dual edge-welded bellows.

Figs. 9A-9B illustrates portion of the gas lift valve, showing the dual bellows during stages of operation.

DETAILED DESCRIPTION

A. Gas Lift Valve Having Single Edge-Welded Bellows and Captive Sliding Seal

[0054] Referring to Figure 3, a gas lift valve 100 has a housing 110 that sets in an appropriate mandrel (not shown). In general, the gas lift valve 100 can be a tubing-retrievable or a wireline-retrievable gas lift valve used in

an appropriate mandrel. Shown primarily here as wireline-retrievable, the housing 110 has seals 114a-b to isolate fluid communication of injected gas from a port (not shown) on the mandrel into a valve port 116 of the valve 100. (Various components of the valve 100, such as a latch connected to the top end, are not shown, but would be present, as one skilled in the art would be appreciated.)

[0055] Internally, a dome chamber 120 and an edge-welded bellows 160 bias a valve piston 130 and control the flow of the injected gas from the valve port 116 to injection ports 118. The dome chamber 120 holds a compressed gas, typically nitrogen, which is filled through a port 113 in a top member 112. This port 113 typically has a core valve (not shown) for filling the chamber 120 and typically has an additional tail plug (not shown) installed during assembly.

[0056] The bellows 160 separates the compressed gas in the dome chamber 120 from communicating with the valve port 116 and injection port 118 so pressure can be maintained in the chamber 120. As shown in Figure 4, an example of the edge-welded bellows 160 for the gas lift valve has several stamped diaphragms 162 and 164 weld together. These stamped diaphragms 162 and 164 are made from metal sheeting using hydraulic stamping techniques. The thickness, shape, and material of these stamped diaphragms 162 and 164 can be configured to suite the pressure, stroke length, spring rate, temperature, and other factors of the application at hand. Various ripple profiles and the diameters of the inside and outside edges 166 and 168 of the stamped diaphragms 162 and 164 can dictate the performance of the bellows 160 so that they are preferably designed using known techniques for the desired application.

[0057] These stamped diaphragms 162 and 164 are stacked back-to-back (male to female) and are welded together at inside and outside diameters 166 and 168 using plasma, laser, arc, or electron beam welding. The upper and lower ends on the bellows 160 can have end plates or flanges welded thereto, or the ends of the bellows 160 can be directly affixed to portions of the piston 130 and housing 110, as shown in Figure 3.

[0058] Looking at the valve piston 130 in more detail in Figure 3, an upper seal 132 can engage an upper seat 122 of the dome chamber 120 when the piston 130 is at its pinnacle position (*i.e.*, fully biased open). The upper seal 132 is preferably made of a metal material, such as copper, which is less hard than the upper seat 122.

[0059] The valve piston 130 can be grooved or slotted along portion of its length to fit in complementary grooves or slots inside the housing 110 to prevent rotation of the valve piston 130. Opposite the bellows 160, the valve piston 130 has a distal end 140 that moves relative to an inner seating surface 115 of the housing 110. The distal end 140 has an outer surface 142, which can be cylindrical in shape to match the seating surface 115 with a close clearance. The housing's inner surface 115 and the distal end's outer surface 142 are disposed axially

along the axis of the valve 100 so that the outer surface 142 can slide with tight clearance relative to the inside surface 115 of the housing 110. A suitable clearance for the two surfaces 115 and 142 would be about ± 0.002 -inch, although other clearances could be used for a given implementation.

[0060] To control fluid flow, a captive sliding seal 170 on the piston's distal end 140 engages or disengages the surface 115 to close and open communication from the valve port 116 to the injection ports 118. The captive sliding seal 170 is installed in a groove around the outside surface 142 of the distal end 140 and moves with the end 140 relative to the internal seating surface 115 of the housing 110 near the inlet 116. (Further details of the captive sliding seal 170 are discussed below with reference to Figures 6A-6B.)

[0061] Any injected gas passing through the seating surface 115 when the distal end 140 is distanced opened therefrom can overcome the bias of a reverse check valve 150 and exit the injection ports 118 to enter the production tubing for the gas lift operation. As is typical, the check valve 150 can be a dart valve with ports 151. A spring 156 biases the check valve 150 toward a seat, which has an elastomeric component 152 and a retainer 154, although other types of seals could be used.

[0062] The bellows 160 is disposed on the valve piston 130 in an ancillary chamber 124 separated from the dome chamber 120 by the chamber seat 122. The valve 100 uses this edge-welded bellow 160 as the membrane between the dome chamber 120 and the annulus injection pressure that opens the valve 100. Contrary to the conventional convoluted bellows used in the art, the bellows 160 is an edge-welded bellows, as discussed below. Moreover, unlike the typical bellows that fully expands when a gas lift valve is closed, the edge-welded bellows 160 is fully compressed when valve 100 is closed, and the bellows 160 goes to expanded state as the valve 100 is being opened by the differential between injection and tubing pressures.

[0063] The single edge-welded bellows 160 moves the piston 130 depending on the pressure difference between the dome pressure and injection pressure. In particular, pressure in the dome chamber 120 acts on the bellows' outside surface while injection pressure acts internally. If there is no injection pressure, the valve 100 is in the closed position, and the bellows 160 is compressed completely to its solid height (like a fully compressed spring). This is unlike the standard convoluted bellows, which is in an expanded state when the gas lift valve is closed.

[0064] As noted above, the bellows 160 is configured to fully compress so that the piston's distal end 140 engages in the sealing surface 115, closing the valve 100. When compressed gas from the casing-tubing annulus (not illustrated) is injected from the surface, the gas enters the inlet 116 during operation of the valve 100. The compressed gas travels internally in the space between the housing 110 and the piston 130 and enters the interior

of the bellows 160. Here, the compressed gas acts against the internal surfaces of the bellows 160, pushing the convolutions against the external dome chamber pressure inside the bellows 160. Meanwhile, pressurized gas and any oil or the like in the dome 120 provides a counteracting force on the external surface of the bellows 160.

[0065] Eventually, a pressure balance (minus tubing pressure effect) for the bellows 160 is reached when the internal injection pressure reaches the external dome chamber's pressure. At this point, the bellows 160 starts to expand, and the valve piston 130 moves toward an open position as injection pressure increases. At some point, when the force of compressed gas inside the bellows 160 is large enough, the bellows 160 fully extends. (Figure 5A shows the edge-welded bellows 160 in a fully extended state with a height h_{\max} .)

[0066] With the bellows 160 fully extended, the upper seal 132 on the piston 130 engages the chamber's seat 122. This prevents further extension of the bellows 160 and further movement of the piston 130. When the bellows 160 extends, the piston 130 moves away from the sealing surface 115, allowing the compressed gas from the inlet 116 to exit the ports 118. This condition is shown in Figure 3.

[0067] The dome chamber 120 is filled with appropriate amount of silicone oil. When the valve 100 is in a vertical working position, the bellow's outside surface is submerged in silicone oil. The silicone oil protects the bellows 160 from internal-injection pressure and prevents valve chatter due to any non-uniform injection flow or pressure. When injection pressure increases and the bellows 160 expands completely, the copper seal 132 on the valve piston 120 reaches the chamber's seat 122. Expansion of the bellows 160 stops and silicone oil is trapped in the volume between the bellow's outside dimension and the dome's internal diameter. In this open condition, the copper seal 132 provides a bellows expansion stop, and the incompressible oil prevents bellows convolution deformations and failure.

[0068] When less compressed gas from the casing-tubing annulus enters the valve 100, the external and internal pressure difference on the bellows 160 may cause the bellows to partially contract the bellows 160 and move the piston's distal end 140 toward the sealing surface 115. (Figure 5B shows the edge-welded bellows 160 in an intermediate state with a contracted height h_0 .)

[0069] When even less or no gas enters the valve 100, the external and internal pressure difference on the metal bellows 160 fully compresses the bellows 160, and the piston's distal end 140 moves against the sealing surface 115. When the bellows 160 fully compresses, the piston's seal 170 engages the seating surface 115, thereby preventing fluid from passing through the valve 100 to the outlet 118. This represents the "closed" condition of the valve 100.

[0070] When the edge-welded bellows 160 is fully compressed, the bellows 160 reverts to its solid, stack height.

(Figure 5C shows the edge-welded bellows 160 in a fully compressed state with a stack height h_{min} .) The full compression protects the bellows 160 from deformation caused by the external dome pressure when the gas lift valve 100 is closed. With the bellows 160 compressed to its solid stack height, there is no room for the bellow's convolutions to deform and fail. The pressure reaches between the bellow's external surfaces since no sealing is provided when convolutions are compressed against each other. Yet, there is no room for the convolutions to deform and yield. Thus, the fully compressing bellows 160 can have a very high-pressure rating.

[0071] During operation of the valve 100, the bellows 160 stays close to pressure balance so the convolutions are protected from overstressing. It is believed that the gas lift valve 100 of Figure 3 may be able to operate at least in pressures as high as 2,500 PSI. By using the single edge-welded bellows 160 with the captive sliding seal 170, the gas lift valve 100 can still have 1" and 1.5" valve diameter. Moreover, the captive sliding seal 170 is not sensitive to explosive decompression.

[0072] It should be noted that due to the tubing pressure effect, the bellows 160 may not be perfectly pressure balanced. However, any pressure difference is not very large, and the pressure difference for various seal diameters and tubing pressure combinations may be expected to range within about 20%. This means that the injection pressure acting on the bellow's surface area minus the seat's ID surface area may be higher than the dome pressure in chamber 120.

[0073] In the gas-lift valve 100, the bellows 160 itself acts as a stop, which reaches its stack height and keeps the piston's distal end 140 from inserting further in the seat 115. Historically, gas lift valves use a tungsten carbide ball and seat to open and close flow through the valve as noted previously. Engagement of the ball with the seat acts as the "stop" for the piston in conventional gas lift valves. Since the edge-welded bellows 160 acts as the "stop," the disclosed gas lift valve 100 can use the captive sliding seal 170, which is a different type of sealing mechanism than typically used.

B. Captive Sliding Seal Arrangement

[0074] To that end, discussion now turns to the captive sliding seal 170 as shown in Figures 6A-6B. The captive sliding seal 170 includes a cap 172 affixed in the opening 144 on the piston's distal end 140. The cap 172 holds a sealing element 176 and a biasing element 174 on the end 140. The biasing element 174 is an O-ring seal, which can be composed of a suitable elastomer for the application. The sealing element 176 can be a ring composed of a polymer, such as polytetrafluoroethylene (PTFE), Teflon®, or the like. (TEFLON is a registered trademark of E. I. Du Pont De Nemours and Company Corporation.)

[0075] The biasing element 174 is held captive in a groove 173 behind the sealing element 176. In this way, the sealing element 176 is energized by the biasing ele-

ment 174 and extends outward from the distal end's outer surface 142 so it can transversely engage the seating surface 115. When engaged with the side of the sealing surface 115, the sealing element 176 as shown in Figure 6B creates a seal as it engages the surface 115 and is biased by the biasing element 174.

[0076] The groove 173 helps anchor the elements 174 and 176 to prevent the seal 170 from displacing during opening of the valve (100). Channels 175 in the cap 172 communicate from the end of the cap 172 to an area of the groove 173 between the biasing and sealing elements 174 and 176. The channels 175 are intended to equalize the pressure on the elements 174 and 176 and may be optional depending on the implementation. As will be appreciated, differential pressure across the seal 170 can be significant and appropriate anchoring of the seal 170 can be necessary for proper functioning.

C. Alternative Captive Sliding Seal Arrangements

[0077] As shown in Figure 7A, the captive sliding seal 170 can be configured in a reverse arrangement on the gas lift valve 100. As shown here, the cap 172 is a ring element that threads into the housing 110 at the sealing surface 115. (Other means for holding the cap 172 could be used, such as external retention pins or the like.) The sealing surface 115 may be an integral part of the housing 110 as before, or a base element 119 as shown can thread into the housing 110 to provide the surface 115 and engage the cap 172.

[0078] The cap 172 holds the biasing element 174 and the sealing element 176 captive in a groove 173. (Here, the groove 173 is formed between the cap 172 and the base element 119.) For its part, the piston's distal end 140 has an outer surface 142, which can be cylindrical and can have a tight clearance to the internal diameter of the housing's sealing surface 115. When the distal end 140 inserts into the sealing surface 115 during valve closure, the captive sliding seal 170 engages the distal end's outer surface 142 to seal off fluid flow from the inlet ports 116 to the check valve 150. This arrangement is especially useful when the valve's performance requires a relatively small diameter for the distal end 140 because the small diameter would make retaining biasing and sealing elements on the distal end 140 problematic.

[0079] Another captive sealing arrangement is shown in Figure 7B, which illustrates portion of the gas lift valve 100. Instead of the distal end 140 on the piston 130 having the sealing elements, a captive sealing seat 180 is disposed in the housing 110 between the inlet 116 and the housing's inner surface 115. The distal end 140 has an outer surface 142, which can be cylindrical in shape to match the seating surface 115 with a close clearance. As the valve 100 operates, the distal end 140 attached to the piston 130 can travel through the captive sealing seat 180 to open and close the valve 100, and the end's outer surface 142 engages the captive sealing seat 180.

[0080] For its part, the captive sealing seat 180 in-

cludes a retaining ring 182 and an energized lip seal 184. The retaining ring 182 can be composed of non-elastomeric material, such as PTFE or metal. As shown, the retaining ring 182 can be held in the housing 110 with retention pins (not shown) inserted externally through retention holes 183 in the housing. Of course, other means known in the art could be used to retain the ring 182. For example, the ring 182 may thread into the housing 110 to hold the seal 184 captive.

[0081] The energized lip seal 184 can be a spring-loaded cup seal disposed in a rod and piston seal configuration. The resiliency of the seal 184 therefore acts transversely to the piston's longitudinal axis. In this way, the seal 184 presses outward into the valve's seating surface 115 and acts transversely to the seating direction of the distal end 170 as shown in Figure 7B. Due to the flow and pressure that the seal 184 may be subjected to during operation, the shape and geometry of the seal 184 is preferably configured, as much as possible, to avoid failure. All the same, the seal 184 offers another type of sealing configuration for the sliding captive seal of the present disclosure.

[0082] Figure 7C shows one arrangement of a spring-loaded cup seal for the seal 184 on the sealing arrangement of Figure 7B. As shown, the spring-loaded cup seal 184 can have a jacket 185, a coil spring 187, and a hat ring 189. The jacket 185 and hat ring 186 are both preferably composed of non-elastomeric materials, and the coil spring 187 is preferably composed of corrosive resistant metal. The seal's internal lip is preferably thick to prevent possible oscillation when exposed to high flow rates of gas or water through the valve 100. Further details of such a captive sealing arrangement having such a spring-loaded cup seal and the like are provided in co-pending U.S. Pat. Appl. Ser. No. 13/027,676, entitled "Self-Boosting, Non-Elastomeric Resilient Seal for Check Seal" and filed 15-FEB-2011, which is incorporated herein by reference in its entirety.

[0083] As will be appreciated, the sealing arrangement of Figures 7B-7C can also be reversed with proper configuration of the components. In this way, the piston's distal end 140 can have the captive sliding seal 180 disposed thereon not unlike the arrangement of Figures 6A-6B, while the housing's sealing surface 115 can be cylindrical and lack a seal.

[0084] The sealing arrangements of Figures 6A-6B and 7A-7C for the captive sliding seals 170/180 allow the distal end 140 to slide with the axial movement of the piston 130 through the valve's surrounding surface 115 when opening and closing the valve. The captive sliding seals 170/180 can avoid problems that conventional seals experience from explosive decompression. In addition, the captive sliding seals 170/180 (especially the seal arrangement of Figs. 6A-6B) can resist erosion that may occur when the valve 100 is operated. For redundancy, both the piston's distal end 140 and the housing's sealing surface 115 can have a captive sliding seal, as long as the two seals are arranged so as not to engage

one another when the valve 100 is fully closed. Moreover, either the distal end 140 or the surface 115 may have more than one captive sliding seal disclosed herein.

D. Gas Lift Valve Having Dual Edge-Welded Bellows and Captive Sliding Seal

[0085] Figure 8 illustrates another gas lift valve 100 according to the present disclosure. In contrast to the previous arrangement, the valve 100 has dual edge-welded bellows 160a-b disposed on the piston 130. Additionally, the piston 130 defines an internal passage having a main passage 135 and ancillary passages 137, which interconnect the interiors of the bellows 160a-b as discussed later. (Figures 9A-9B illustrate portion of the gas lift valve 100, showing the dual bellows 160a-b during stages of operation.)

[0086] As before, the gas lift valve 100 has seals 114a-b on the housing 110 to isolate fluid communication of injected gas into a valve port 116 of the valve 100. A dome chamber 120 and the dual edge-welded bellows 160a-b then bias a valve piston 130 and control the flow of the injected gas from the valve port 116 to injection ports 118. The dome chamber 120 holds a compressed gas, typically nitrogen, which is filled through a port 113 in a top member 112 and later sealed with a plug (not shown). The two bellows 160a-b separate the compressed gas in the chamber 120 from communicating with the valve port 116 and injection port 118 so pressure can be maintained in the chamber 120. During valve operation, both bellows 160a-b are very close to internal/external pressure balance, which is helpful to protect the bellows 160a-b.

[0087] Looking in particular at the valve piston 130, an upper connector or shoulder 131a on the piston 130 has one end of the upper bellows 160a affixed thereto; the other end of the upper bellows 160a affixes to the top surface or end wall on an intermediate body 124. This upper connector 131a and the exterior of the upper bellows 160a are exposed to pressure in the dome chamber 120. The valve piston 130 also has a lower connector or shoulder 131b to which one end of the lower bellows 160b affixes; the other end of the lower bellows 160b affixes to the bottom surface or end wall on the intermediate body 124. The lower connector 131b and the exterior of the lower bellows 160b are exposed to pressure in an ancillary chamber 117. Pressure acting outside the upper bellows 160a transfers via the piston's passages 135 and 137 to the interior of the lower bellows 160b. The reverse is also true.

[0088] The valve piston 130 also has a distal end 140 that moves relative to an inner seating surface 115 of the housing 110. As before, a captive sliding seal 170 on the distal end 140 engages or disengages the surface 115 to close and open communication from the valve port 116 to the injection ports 118. (Although shown with the captive sliding seal 170 on the distal end 140, this valve 100 of Figure 8 can have any of the other seal arrangements

disclosed herein.) Any injected gas passing through the seating surface 115 when the distal end 140 is distanced opened therefrom can overcome the bias of a reverse check valve 150 and exit the injection ports 118 to enter the production tubing for the gas lift operation.

[0089] Turning in particular to Figures 9A-9B, the bellows 160a-b and the piston 130 are shown relative to the intermediate body 124 when the valve 100 is fully open (Fig. 9A) and fully closed (Fig. 9B). As shown when the valve 100 is open in Figure 9A, the lower bellows 160b is configured to fully compress when the distal end (140) disengages from the sealing surface (115), opening the valve 100. Contrariwise, the upper bellow 160a is configured to extend when the valve is open. As shown when the valve 100 is closed in Figure 9B, the upper bellows 160a is configured to fully compress when the distal end (140) engages in the sealing surface (115), closing the valve 100. Contrariwise, the lower bellows 160b is configured to extend when the valve is closed.

[0090] For assembly, one end of each bellows 160a-b welds to the bellow connector 131a-b, which has a surface machined to match the bellow's convolution geometry. Opposite ends of each bellow 160a-b are welded to mating surfaces 125a-b on the intermediate body 124, which has its surfaces 125a-b machined to match the bellow's convolution geometry. The matching surfaces 125a-b on the body 124 and the surfaces on the connectors 131a-b allow the bellows 160a-b to be compressed to solid height against the surfaces for full contact without deformation/damage to bellows' convolutions. In other words, the bottom and top surfaces 125a-b of the intermediate body 124 match the shape of an edge-welded diaphragm of the bellows 160a-b, and the surfaces of the caps 131a-b also match the shape of an edge-welded diaphragm of the bellows 160a-b. Thus, when the bellows 160a-b are fully compressed to their stack height, the surfaces and caps 131a-b will not tend to deform the bellows 160a-b.

[0091] Once the bellows 160a-b are welded to the mating parts, the bellows 160a-b are filled with an incompressible fluid, such as silicone oil. The lower bellow 160a is fully compressed during the filling. Once filled, plugs 129 and 133 are installed respectively in opening 128 in the intermediate body 124 and in the opening 133 on the upper connector 131a. Once filled, oil can then flow between the upper and lower bellows 160a-b depending on which bellow pressure is acting through the communication passages 135 and 137 in the piston 130.

[0092] The chamber 120 is charged with compressed gas, such as nitrogen, at a desired high pressure through the end piece (112), whose opening (113) is plugged after filing. With only the dome pressure, the pressure in the chamber 120 acts on the upper bellow's external surface, causing it to fully compress (Fig. 9B) to its solid length (similar to a fully compressed spring) when injection pressure is not present.

[0093] With the dome pressure acting alone, the seal piston 130 moves the distal end 140 toward the seating

surface (115), and the captive sliding seal (170) engages the surface (115) as discussed previously. There is no flow through the valve 100 at this point. The lower bellow 160b remains extended to its free length, and the internal oil has pumped from the upper bellow 160a to the lower bellow 160b through the piston's passages 135 and 137.

[0094] The pressure difference on the bellows 160a-b fully compresses the upper bellows 160a and fully extend the lower bellows 160b to move the piston's distal end 140 against the sealing surface (115). The captive sliding seal 170 engages seating surface (115), thereby preventing injection gas from passing through the valve 100 to the outlet (118). This represents the "closed" condition of the valve 100.

[0095] When the upper bellows 160a is fully compressed, the bellows 160a reverts to its solid height, and no more oil flow occurs once the upper bellow 160a is fully compressed. The full compression protects the bellows 160a from deformation caused by the external dome pressure when the gas lift valve 100 is closed. Moreover, the compressed upper bellows 160a acts as a stop to the piston's movement. Thus, the dynamic seal can be used as discussed herein with its advantages over conventional sealing engagements.

[0096] With the bellows 160a compressed to its solid stack height, there is no room for the bellow's convolutions to deform and fail. The pressure reaches between the bellow's external surfaces since no sealing is provided when convolutions are compressed against each other. Yet, there is no room for the convolutions to deform and yield. Regardless of future dome pressure increases, the upper bellow 160a does not compress further (since it is already fully compressed), and no oil flows to the lower bellow 160b. In this way, high-dome pressure does not transmit to the lower bellow 160b. It is expected that this gas lift valve 100 with the arrangement of two bellows 160a-b can operate up to 10k PSI.

[0097] When compressed gas from the casing-tubing annulus (not illustrated) is injected from the surface, the gas enters the inlet 116 during operation of the valve 100. The compressed gas travels internally in the space between the housing 110 and the distal end 140 and enters the ancillary chamber 117. Here, the compressed gas acts against the lower cap 131b and against the external surfaces of the lower bellows 160b. This pressure then tends to push the bellow's convolutions against the internal dome chamber pressure inside the bellows 160b, which is communicated from the chamber 120 via the upper bellows 160a and oil in the piston's passages 135 and 137.

[0098] As long as the dome pressure's force is larger than the force created by the injection pressure, the valve piston 130 does not move, and the valve 100 remains closed. Once injection pressure increases sufficiently and the injection force acting on the lower bellow 160b becomes larger than the dome pressure, the piston 130 moves upward, and the gas-lift valve 100 opens. The external and internal pressure difference on the bellows

160a-b may partially contract the upper bellows 160a and extend the lower bellows 160b to move the piston's distal end 140 away from the sealing surface 115. Flow is now established through the valve 100, pushing the reverse check dart 150 to the open position and allowing gas to exit the valve 100 through the nose ports 118.

[0099] Increasing injection pressure and gas flow further compresses the lower bellow 160b as the piston 130 is forced upward. The internal oil travels from the lower bellow 160b to the upper bellow 160a via the internal passages 135 and 137. Finally, with enough force, the lower bellow 160b will fully compress to its solid stack height. In the open position shown in Figure 8, the lower bellows 160b is fully compressed, and the upper bellows 160b is fully extended. The lower bellows 160b acts as a stop to the piston 130 and keeps the upper bellows 160a from over extending. (Figure 9A shows a detail of the edge-welded bellows 160a-b and piston in an open condition.)

[0100] At this point, the bellow 160b is fully protected from deformation and damage since it acts as a piece of metal cylinder. The upper bellow 160a is now fully expanded to its free length. Regardless of further injection pressure increase, the oil stops flowing from the lower bellow 160a to the upper bellow 160b, and pressure does not transmit to the upper bellow 160a because movement is stopped by the stacked lower bellow 160b.

[0101] Bellow protection uses the full compression to solid stack height for both bellows 160a-b during valve operation when the valve 100 is open or closed. Full compression to solid height means that the bellows 160a-b are acting as a mechanical stop. When the valve 100 is fully closed, the upper bellow 160a is a mechanical stop. When the valve 100 is fully open, the lower bellow 160b is a mechanical stop in the opposite direction. The captive sliding seal 170 can therefore act dynamical as a sliding seal that can seal flow while allowing the bellows 160b to fully compress.

[0102] The gas lift valve 100 can be used for deepwater gas lift applications and applications involving very high injection pressures, although any number of implementations may benefit from the valve 100. The pressure rating of the gas lift valve 100 can be increased by using bellows 160 composed of an Inconel® alloy (e.g., Inconel® alloy 718) rather than a Monel® alloy. (INCONEL and MONEL are registered trademarks of Special Metals Corporation). Moreover, other techniques known in the art can help keep the bellows 160 from being damaged when operated with high differential pressure.

[0103] The foregoing description of preferred and other embodiments is not intended to limit or restrict the scope or applicability of the inventive concepts conceived of by the Applicant. With the benefit of the present disclosure, one skilled in the art will appreciate that features of one embodiment or arrangement disclosed herein can be combined with or exchanged for other embodiments or arrangements disclosed herein. Thus, the various captive sliding seal arrangements disclosed herein in Figures

6A through 7C can be used on either valve 100 of Figures 3 or 8. Moreover, the gas lift valves 100 have been shown and described primarily as wireline-retrievable gas lift valves intended to install in a side pocket mandrel. As will be appreciated, this is not strictly necessary, and the disclosed valves 100 can be used as a wireline or tubing-retrievable apparatus and can be configured for use with any type of mandrel, even conventional mandrels having external mounts.

Claims

1. A gas lift apparatus, comprising:

a housing (110) having a chamber, an inlet (116), and an outlet (118) and having an internal surface (115) disposed between the inlet (116) and the outlet (118);

a piston (130) movably disposed along an axis in the housing (110), the piston (130) having a proximal end (131a) exposed to chamber pressure and having a distal end (140) exposed to inlet pressure, the distal end (140) having an external surface (142) selectively movable relative to the internal surface (115);

at least one edge-welded bellows (160 or 160a-b) disposed on the piston (130) and separating the inlet pressure from the chamber pressure; and

a sliding seal (170, 180) configured between the internal and external surfaces (115, 142), the seal (170, 180) selectively sealing fluid communication from the inlet (116) to the outlet (118) and allowing the external surface (142) to slide relative to the internal surface (115) with the movement of the piston (130) along the axis, wherein one of the at least one edge-welded bellows (160 or 160a) compresses when the piston (130) moves in a closing direction along the axis, and wherein the one edge-welded bellows (160 or 160a) when fully compressed to a stacked height stops further movement of the piston (130) in the closing direction.

2. The apparatus of claim 1, further comprising a check valve (150) disposed in the housing (110), the check valve (150) permitting fluid communication from the inlet (116) to the outlet (118) and restricting fluid communication from the outlet (118) to the inlet (116).

3. The apparatus of claim 1 or 2, wherein the seal (170, 180) is disposed on the external surface (142) of the distal end (140), the seal (170, 180) biased transversely to the axis of the piston (130) and engaging the internal surface (115) of the housing (110) when disposed adjacent thereto.

4. The apparatus of claim 3, wherein:

the seal (170) comprises a sealing ring (176) and a resilient ring (174) disposed in a groove (173) defined around the external surface (142), the resilient ring (174) biasing the sealing ring (176) away from the external surface (142); and/or

the seal (180) comprises a spring-loaded cup seal having a lip biased away from the external surface (142).

5. The apparatus of claim 1 or 2, wherein the seal (170, 180) is disposed on the internal surface (115) of the housing (110), the seal (170, 180) biased transversely to the axis of the piston (130) and engaging the external surface (142) of the distal end (140) when disposed adjacent thereto.

6. The apparatus of claim 5, wherein:

the seal (170) comprises a sealing ring (176) and a resilient ring (174) disposed in a groove (172) defined around the internal surface (115) of the housing (110), the resilient ring (174) biasing the sealing ring away (176) from the internal surface (115); and/or

the seal (180) comprises a spring-loaded cup seal having a lip biased away from the internal surface (115).

7. The apparatus of any one of the preceding claims, wherein the chamber comprises a seat, and wherein the piston comprises a seal element engaging the seat when the piston moves to a pinnacle position away from the seal.

8. The apparatus of any one of the preceding claims, wherein the one edge-welded bellows (160 or 160a) comprises a first edge-welded bellows (160 or 160a) fully compressing to a first stacked height at a first point when the seal (170, 180) seals fluid communication and stopping the further movement of the piston (130) in the closing direction along the axis.

9. The apparatus of claim 8, wherein the first edge-welded bellows (160a) comprises a plurality of edge-welded diaphragms (162, 164) being stacked on top of one another when fully compressed in the first stacked height.

10. The apparatus of claim 9, wherein the chamber (120) comprises a first end wall (125a) having a shape corresponding to one of the edge-welded diaphragms (162, 164) and having one end of the first edge-welded bellows (160a) affixed thereto; and wherein the piston (130) comprises a first shoulder having a shape corresponding to one of the edge-

welded diaphragms (162, 164) and having another end of the first edge-welded bellows (160a) affixed thereto.

11. The apparatus of any one of the preceding claims, wherein another of the at least one edge-welded bellows (160b) comprises a second edge-welded bellows (160b) disposed on the piston (130) and separating the inlet pressure from the chamber pressure, the second edge-welded bellows (160b) fully compressing to a second stacked height when the external surface (142) is distanced away from the internal surface (115) and stopping the movement of the piston (130) in an opening direction along the axis opposite to the closing direction.

12. The apparatus of 11, wherein the second edge-welded bellows (160b) comprises a plurality of edge-welded diaphragms (162, 164) being stacked on top of one another when fully compressed in the second stacked height.

13. The apparatus of claim 12, wherein the chamber (120) comprises a second end wall (125b) having a shape corresponding to one of the edge-welded diaphragms (162, 164) and having one end of the second edge-welded bellows (160b) affixed thereto; and wherein the piston (130) comprises a second shoulder having a shape corresponding to one of the edge-welded diaphragms (162, 164) and having another end of the second edge-welded bellows (160b) affixed thereto.

14. The apparatus of any one of the preceding claims, wherein the at least one edge-welded bellows (160a-b) comprises a first bellows (160a) having a first interior and comprises a second bellows (160b) having a second interior; and wherein the piston (130) comprises an internal passage (135) communicating the first interior of the first bellows (160a) with the second interior of the second bellows (160b).

15. The apparatus of claim 14, wherein the first and second interiors communicate a pressure differential between the inlet pressure and the chamber pressure via the internal passage (135), and an incompressible fluid fills the first and second interiors and the internal passage (135).

Patentansprüche

1. Gashubvorrichtung, die Folgendes umfasst:

ein Gehäuse (110), das eine Kammer, einen Einlass (116) und einen Auslass (118) hat und eine Innenfläche (115), die zwischen dem Einlass (116) und dem Auslass (118) angeordnet

- ist,
einen Kolben (130), der beweglich entlang einer Achse in den Gehäuse (110) angeordnet ist, wobei der Kolben (130) ein proximales Ende (131a) hat, das einem Kammerdruck ausgesetzt ist, und ein distales Ende (140) hat, das einem Einlassdruck ausgesetzt ist, wobei das distale Ende (140) eine Außenfläche (142) hat, die selektiv im Verhältnis zu der Innenfläche (115) beweglich ist,
wenigstens einen kantengeschweißten Balg (160 oder 160a-b), der an dem Kolben (130) angeordnet ist und den Einlassdruck von dem Kammerdruck trennt, und
eine Gleitdichtung (170, 180), die zwischen der Innen- und der Außenfläche (115, 142) konfiguriert ist, wobei die Dichtung (170, 180) selektiv eine Fluidverbindung von dem Einlass (116) zu dem Auslass (118) abdichtet und ermöglicht, dass die Außenfläche (142) im Verhältnis zu der Innenfläche (115) mit der Bewegung des Kolbens (130) entlang der Achse gleitet, wobei sich einer von dem wenigstens einen kantengeschweißten Balg (160 oder 160a) zusammendrückt, wenn sich der Kolben (130) in einer Schließrichtung entlang der Achse bewegt, und wobei der eine kantengeschweißte Balg (160 oder 160a), wenn er vollständig zu einer geschichteten Höhe zusammengedrückt ist, eine weitere Bewegung des Kolbens (130) in der Schließrichtung anhält.
2. Vorrichtung nach Anspruch 1, die ferner ein Rückschlagventil (150) umfasst, das in dem Gehäuse (110) angeordnet ist, wobei das Rückschlagventil (150) eine Fluidverbindung von dem Einlass (116) zu dem Auslass (118) ermöglicht und eine Fluidverbindung von dem Auslass (118) zu dem Einlass (116) einschränkt.
3. Vorrichtung nach Anspruch 1 oder 2, wobei die Dichtung (170, 180) an der Außenfläche (142) des distalen Endes (140) angeordnet ist, wobei die Dichtung (170, 180) quer zu der Achse des Kolbens (130) vorgespannt ist und die Innenfläche (115) des Gehäuses (110) in Eingriff nimmt, wenn sie angrenzend an dieselbe angeordnet wird.
4. Vorrichtung nach Anspruch 3, wobei:
- die Dichtung (170) einen Dichtungsring (176) und einen elastischen Ring (174) umfasst, angeordnet in einer Rille (173), die um die Außenfläche (142) definiert ist, wobei der elastische Ring (174) den Dichtungsring (176) von der Außenfläche (142) weg vorspannt, und/oder die Dichtung (180) eine federbelastete Napfdichtung umfasst, die eine Lippe hat, die von der

Außenfläche (142) weg vorgespannt wird.

5. Vorrichtung nach Anspruch 1 oder 2, wobei die Dichtung (170, 180) an der Innenfläche (115) des Gehäuses (110) angeordnet ist, wobei die Dichtung (170, 180) quer zu der Achse des Kolbens (130) vorgespannt wird und die Außenfläche (142) des distalen Endes (140) in Eingriff nimmt, wenn sie angrenzend an dieselbe angeordnet wird.
6. Vorrichtung nach Anspruch 5, wobei:
- die Dichtung (170) einen Dichtungsring (176) und einen elastischen Ring (174) umfasst, angeordnet in einer Rille (173), die um die Innenfläche (115) des Gehäuses (110) definiert ist, wobei der elastische Ring (174) den Dichtungsring (176) von der Innenfläche (115) weg vorspannt, und/oder die Dichtung (180) eine federbelastete Napfdichtung umfasst, die eine Lippe hat, die von der Innenfläche (115) weg vorgespannt wird.
7. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die Kammer einen Sitz umfasst und wobei der Kolben ein Dichtungselement umfasst, das den Sitz in Eingriff nimmt, wenn sich der Kolben zu einer Spitzenstellung von der Dichtung weg bewegt.
8. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei der eine kantengeschweißte Balg (160 oder 160a) einen ersten kantengeschweißten Balg (160 oder 160a) umfasst, der sich an einem ersten Punkt zu einer ersten geschichteten Höhe vollständig zusammendrückt, wenn die Dichtung (170, 180) die Fluidverbindung abdichtet, und die weitere Bewegung des Kolbens (130) in der Schließrichtung entlang der Achse anhält.
9. Vorrichtung nach Anspruch 8, wobei der erste kantengeschweißte Balg (160a) mehrere kantengeschweißte Membranen (162, 164) umfasst, die übereinander geschichtet sind, wenn er in der ersten geschichteten Höhe vollständig zusammengedrückt ist.
10. Vorrichtung nach Anspruch 9, wobei die Kammer (120) eine erste Stirnwand (125a) umfasst, die eine Form hat, die einer der kantengeschweißten Membranen (162, 164) entspricht, und die ein Ende des kantengeschweißten Balgs (160a) an derselben befestigt hat, und wobei der Kolben (130) einen ersten Absatz umfasst, der eine Form hat, die einer der kantengeschweißten Membranen (162, 164) entspricht, und ein anderes Ende des kantengeschweißten Balgs (160a) an demselben befestigt hat.

11. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei ein anderer von dem wenigstens einen kantengeschweißten Balg (160b) einen zweiten kantengeschweißten Balg (160b) umfasst, der an dem Kolben (130) angeordnet ist und den Einlassdruck von dem Kammerdruck trennt, wobei sich der zweite kantengeschweißte Balg (160b) vollständig zu einer zweiten geschichteten Höhe zusammen-drückt, wenn die Außenfläche (142) von der Innenfläche (115) weg entfernt wird, und die Bewegung des Kolbens (130) in einer Öffnungsrichtung entlang der Achse, entgegengesetzt zu der Schließrichtung, anhält.
12. Vorrichtung nach Anspruch 11, wobei der zweite kantengeschweißte Balg (160b) mehrere kantengeschweißte Membranen (162, 164) umfasst, die übereinander geschichtet sind, wenn er in der zweiten geschichteten Höhe vollständig zusammengedrückt ist.
13. Vorrichtung nach Anspruch 12, wobei die Kammer (120) eine zweite Stirnwand (125b) umfasst, die eine Form hat, die einer der kantengeschweißten Membranen (162, 164) entspricht, und die Ende des zweiten kantengeschweißten Balgs (160b) an derselben befestigt hat, und wobei der Kolben (130) einen zweiten Absatz umfasst, der eine Form hat, die einer der kantengeschweißten Membranen (162, 164) entspricht, und ein anderes Ende des zweiten kantengeschweißten Balgs (160b) an demselben befestigt hat.
14. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei der wenigstens eine kantengeschweißte Balg (160a-b) einen ersten Balg (160a), der ein erstes Inneres hat, und einen zweiten kantengeschweißten Balg (160b), der ein zweites Inneres hat, umfasst und wobei der Kolben (130) einen inneren Durchgang (135) umfasst, der das erste Innere des ersten Balgs (160a) mit dem zweiten Inneren des zweiten Balgs (160b) verbindet.
15. Vorrichtung nach Anspruch 14, wobei das erste und das zweite Innere einen Druckunterschied zwischen dem Einlassdruck und dem Kammerdruck über den inneren Durchgang (135) kommunizieren und ein nicht zusammendrückbares Fluid das erste und das zweite Innere und den inneren Durchgang (135) füllt.

Revendications

1. Dispositif d'extraction au gaz, comprenant :
- un logement (110) comportant une chambre, une entrée (116) et une sortie (118) et possédant une surface intérieure (115) disposée entre

l'entrée (116) et la sortie (118), un piston (130) disposé de façon mobile le long d'un axe dans le logement (110), le piston (130) comportant une extrémité proximale (131a) exposée à la pression de la chambre et une extrémité distale (140) exposée à la pression d'entrée, l'extrémité distale (140) possédant une surface extérieure (142) sélectivement mobile par rapport à la surface intérieure (115), au moins un soufflet à bords soudés (160 ou 160a-b) disposé sur le piston (130) et séparant la pression d'entrée de la pression de la chambre, et un joint couissant (170, 180) agencé entre les surfaces intérieure et extérieure (115, 142), le joint (170, 180) obturant sélectivement une communication de fluide de l'entrée (116) à la sortie (118) et permettant à la surface extérieure (142) de coulisser par rapport à la surface intérieure (115) lors du déplacement du piston (130) le long de l'axe, dans lequel l'un des au moins un soufflet à bords soudés (160 ou 160a) est comprimé lorsque le piston (130) se déplace dans une direction de fermeture le long de l'axe, et dans lequel le au moins un soufflet à bords soudés (160 ou 160a), lorsqu'il est entièrement comprimé jusqu'à une hauteur empilée, arrête un déplacement supplémentaire du piston (130) dans la direction de fermeture.

2. Dispositif selon la revendication 1, comprenant en outre un clapet de non-retour (150) disposé dans le logement (110), le clapet de non-retour (150) permettant une communication de fluide de l'entrée (116) à la sortie (118) et empêchant la communication de fluide de la sortie (118) à l'entrée (116).
3. Dispositif selon la revendication 1 ou 2, dans lequel le joint (170, 180) est disposé sur la surface extérieure (142) de l'extrémité distale (140), le joint (170, 180) étant sollicité transversalement vers l'axe du piston (130) et mettant en prise la surface intérieure (115) du logement (110) lorsqu'il est disposé de façon adjacente à celle-ci.
4. Dispositif selon la revendication 3, dans lequel :

le joint (170) comprend une bague d'étanchéité (176) et une bague élastique (174) disposée dans une encoche (173) définie autour de la surface extérieure (142), la bague élastique (174) sollicitant la bague d'étanchéité (176) à distance de la surface extérieure (142), et/ou le joint (180) comprend un joint calotte à ressort possédant une lèvre sollicitée loin de la surface extérieure (142).

5. Dispositif selon la revendication 1 ou 2, dans lequel le joint (170, 180) est disposé sur la surface intérieure (115) du logement (110), le joint (170, 180) étant sollicité transversalement à l'axe du piston (130) et mettant en prise la surface extérieure (142) de l'extrémité distale (140) lorsqu'il est disposé de façon adjacente à celle-ci. 5
6. Dispositif selon la revendication 5, dans lequel : 10
 - le joint (170) comprend une bague d'étanchéité (176) et une bague élastique (174) disposée dans une encoche (173) définie autour de la surface intérieure (115) du logement (110), la bague élastique (174) sollicitant la bague d'étanchéité (176) à distance de la surface intérieure (115), et/ou 15
 - le joint (180) comprend un joint calotte à ressort possédant une lèvre sollicitée loin de la surface intérieure (115). 20
7. Dispositif selon l'une quelconque des revendications précédentes, dans lequel la chambre comprend un siège, et dans lequel le piston comprend un élément d'étanchéité mettant en prise le siège, lorsque le piston se déplace jusqu'à une position de sommet loin du joint. 25
8. Dispositif selon l'une quelconque des revendications précédentes, dans lequel le un soufflet à bords soudés (160 ou 160a) comprend un premier soufflet à bords soudés (160 ou 160a) se comprimant entièrement jusqu'à une première hauteur empilée au niveau d'un premier point où le joint (170, 180) obture une communication de fluide et arrêtant un déplacement supplémentaire du piston (130) dans la direction de fermeture le long de l'axe. 30
9. Dispositif selon la revendication 8, dans lequel le premier soufflet à bords soudés (160a) comprend une pluralité de diaphragmes à bords soudés (162, 164) étant empilés l'un sur l'autre lorsqu'il est entièrement comprimé dans la première hauteur empilée. 35
10. Dispositif selon la revendication 9, dans lequel la chambre (120) comprend une première paroi d'extrémité (125a) ayant une forme correspondant à l'un des diaphragmes à bords soudés (162, 164) et à laquelle une extrémité du premier soufflet à bords soudés (160a) est apposée, et dans lequel le piston (130) comprend un premier épaulement ayant une forme correspondant à l'un des diaphragmes à bords soudés (162, 164) et auquel une autre extrémité du premier soufflet à bords soudés (160a) est apposée. 40 50
11. Dispositif selon l'une quelconque des revendications précédentes, dans lequel l'autre des au moins un soufflet à bords soudés (160b) comprend un second soufflet à bords soudés (160b) disposé sur le piston (130) et séparant la pression d'entrée de la pression de la chambre, le second soufflet à bords soudés (160b) se comprimant entièrement jusqu'à une seconde hauteur empilée quand la surface extérieure (142) est éloignée de la surface intérieure (115) et arrêtant le déplacement du piston (130) dans une direction d'ouverture le long de l'axe opposée à la direction de fermeture. 55
12. Dispositif selon la revendication 11, dans lequel le second soufflet à bords soudés (160b) comprend une pluralité de diaphragmes à bords soudés (162, 164) empilés l'un sur l'autre lorsqu'il est entièrement comprimé jusqu'à la seconde hauteur empilée.
13. Dispositif selon la revendication 12, dans lequel la chambre (120) comprend une seconde paroi d'extrémité (125b) ayant une forme correspondant à l'un des diaphragmes à bords soudés (162, 164) et à laquelle une extrémité du second soufflet à bords soudés (160b) est apposée, et dans lequel le piston (130) comprend un second épaulement ayant une forme correspondant à l'un des diaphragmes à bords soudés (162, 164) et auquel une autre extrémité du second soufflet à bords soudés (160a) est apposée.
14. Dispositif selon l'une quelconque des revendications précédentes, dans lequel le au moins un soufflet à bords soudés (160a-b) comprend un premier soufflet (160a) ayant un premier intérieur et comprend un second soufflet (160b) ayant un second intérieur, et dans lequel le piston comprend un passage intérieur (135) qui fait communiquer le premier intérieur du premier soufflet (160a) avec le second intérieur du second soufflet (160b).
15. Dispositif selon la revendication 14, dans lequel les premier et second intérieurs communiquent une pression différentielle entre la pression d'entrée et la pression de chambre via le passage intérieur (135) et un fluide incompressible remplit les premier et second intérieurs et le passage intérieur (135).

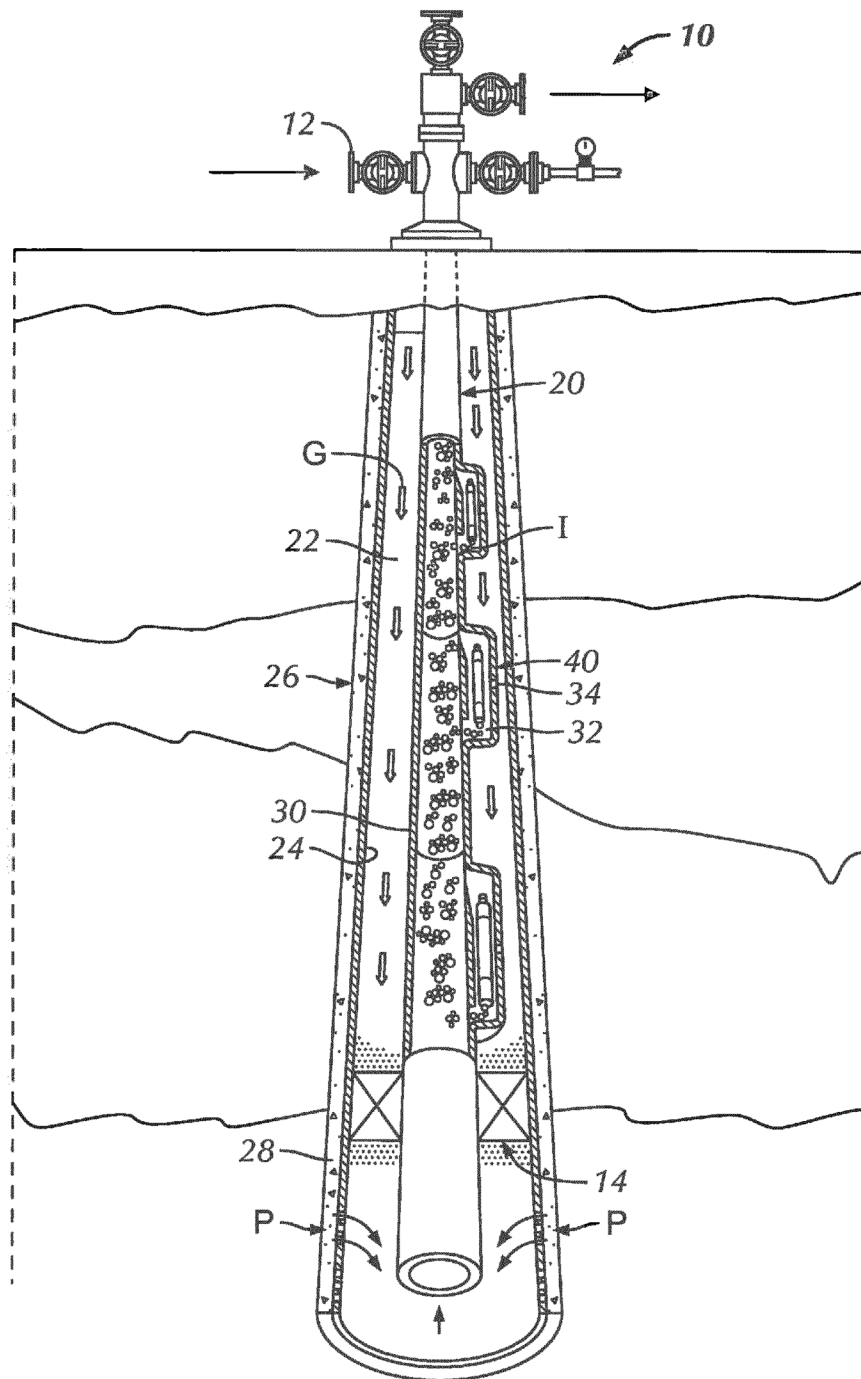
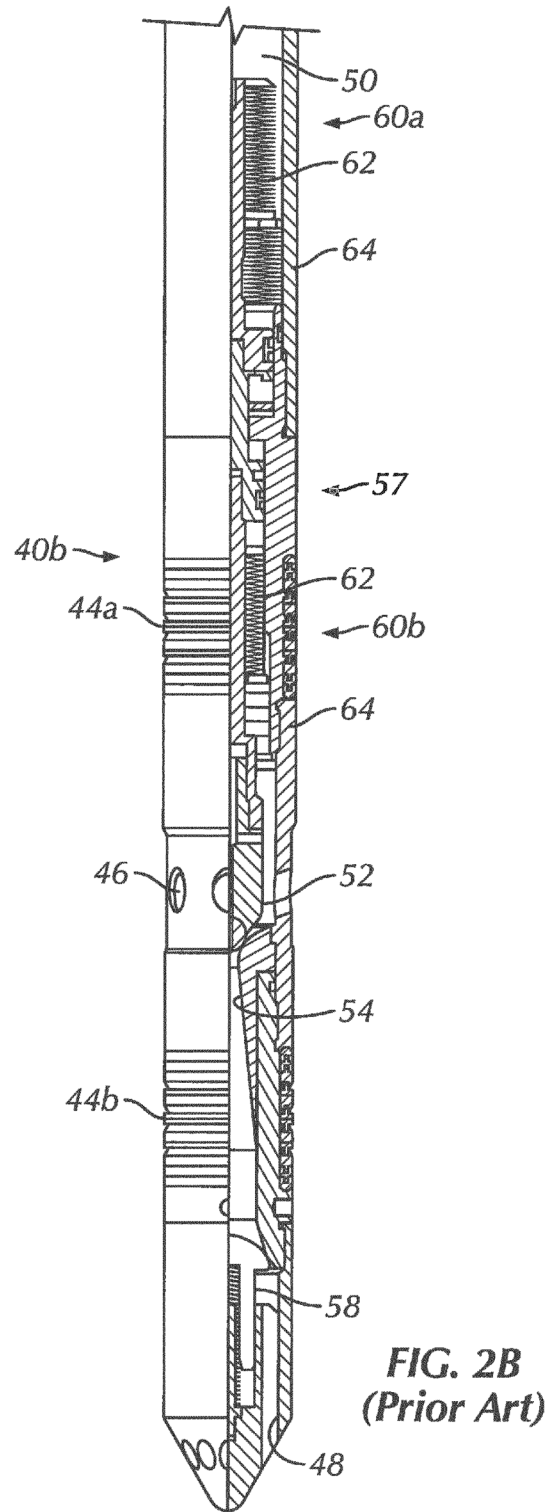
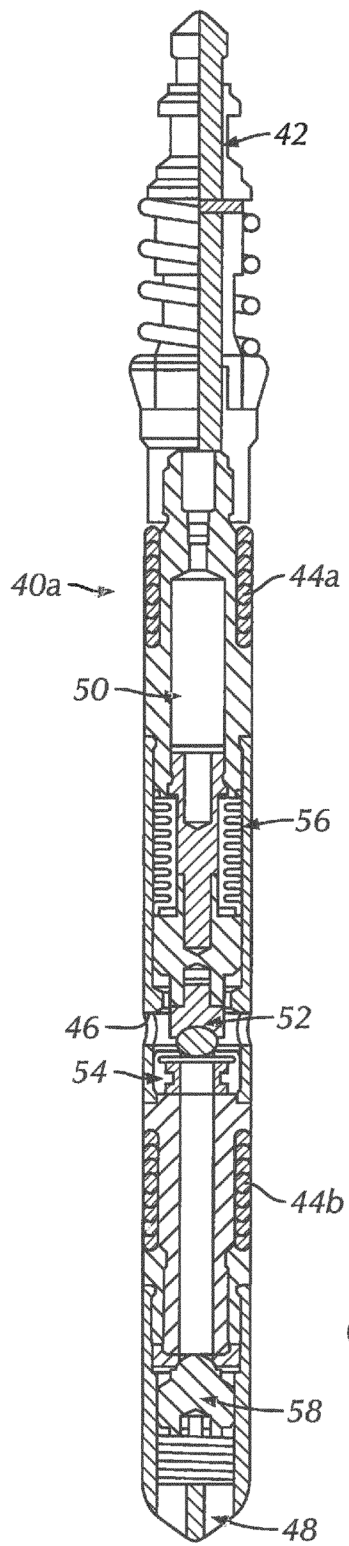


FIG. 1
(Prior Art)



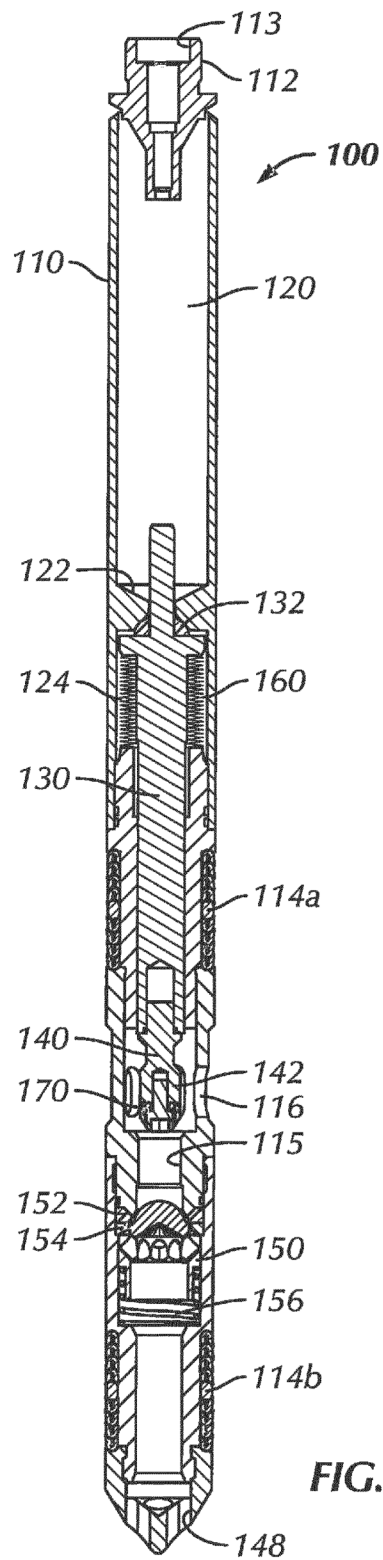


FIG. 3

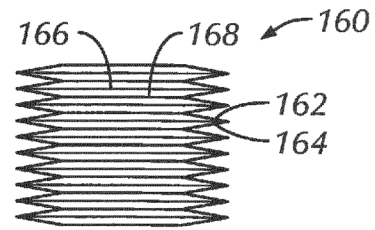


FIG. 4

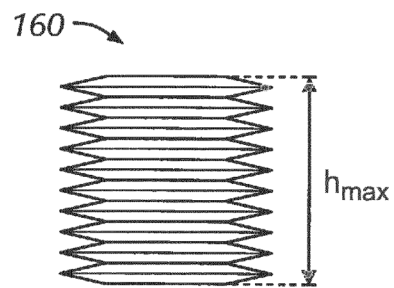


FIG. 5A

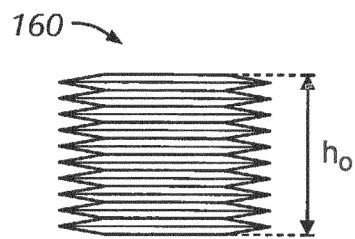


FIG. 5B



FIG. 5C

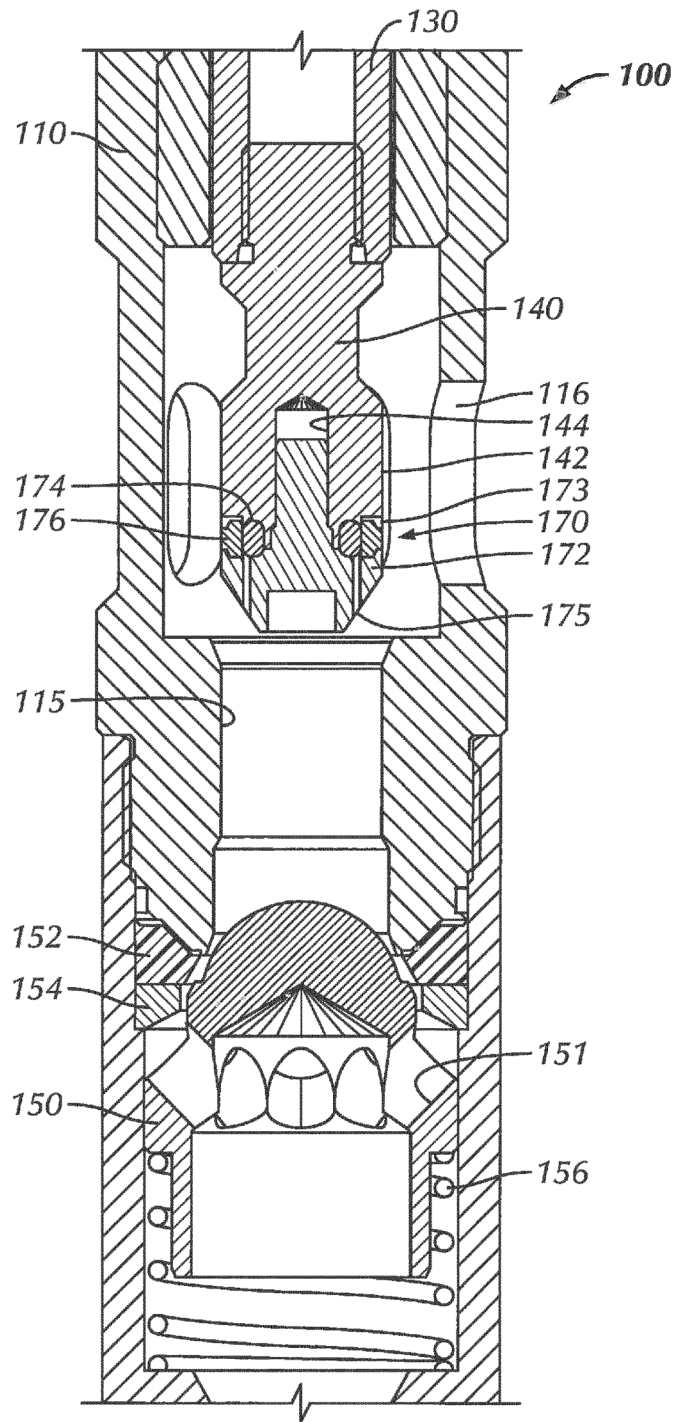


FIG. 6A

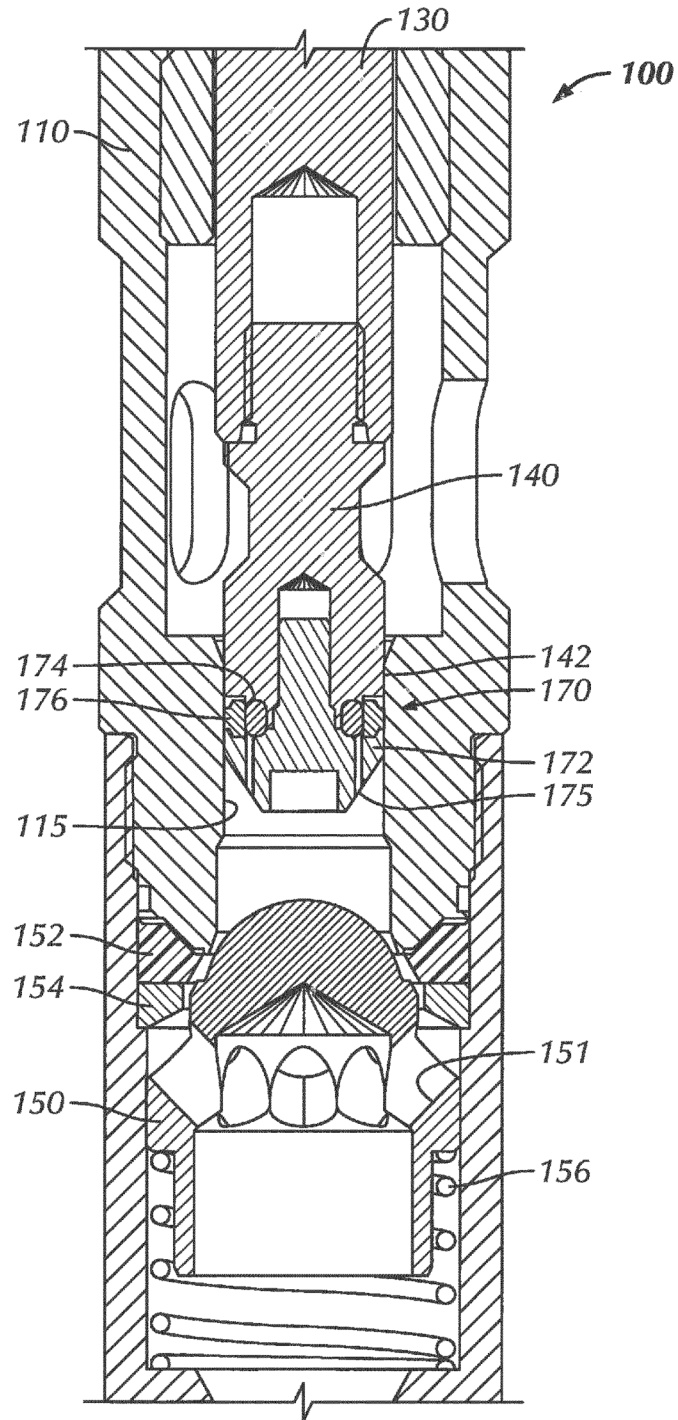


FIG. 6B

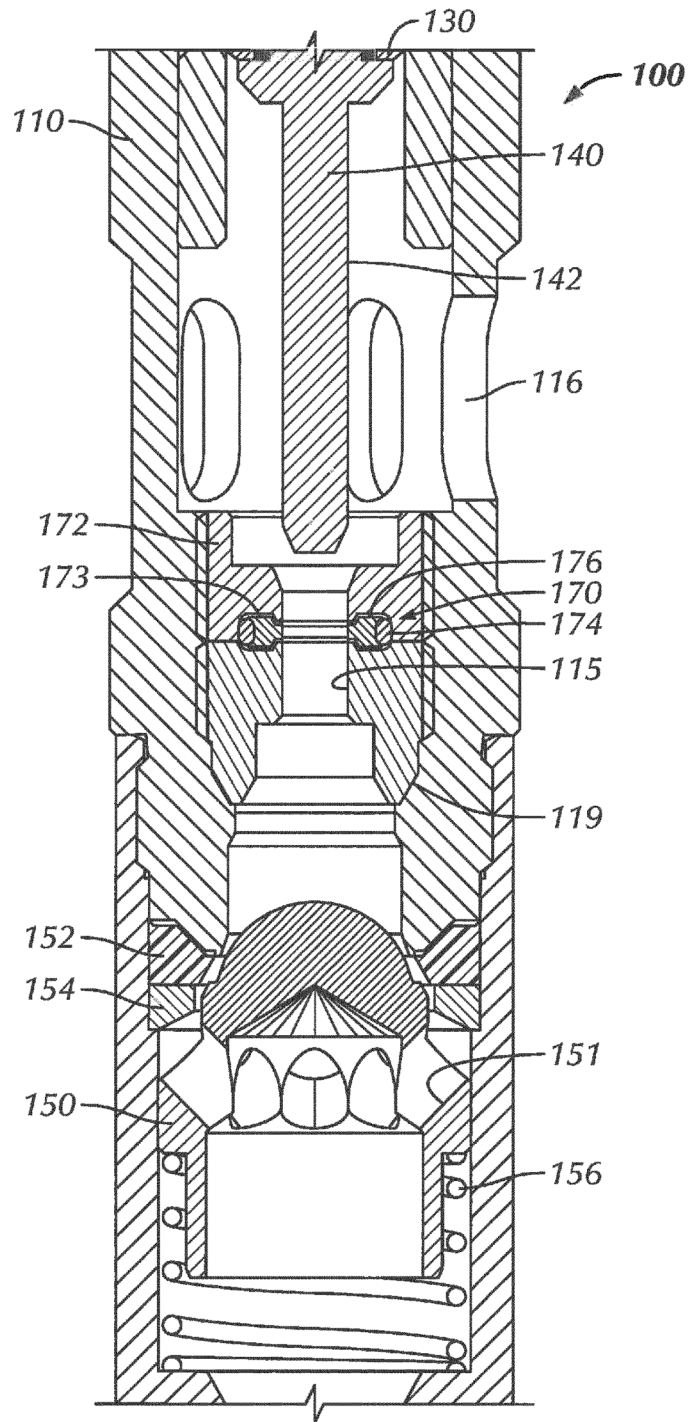


FIG. 7A

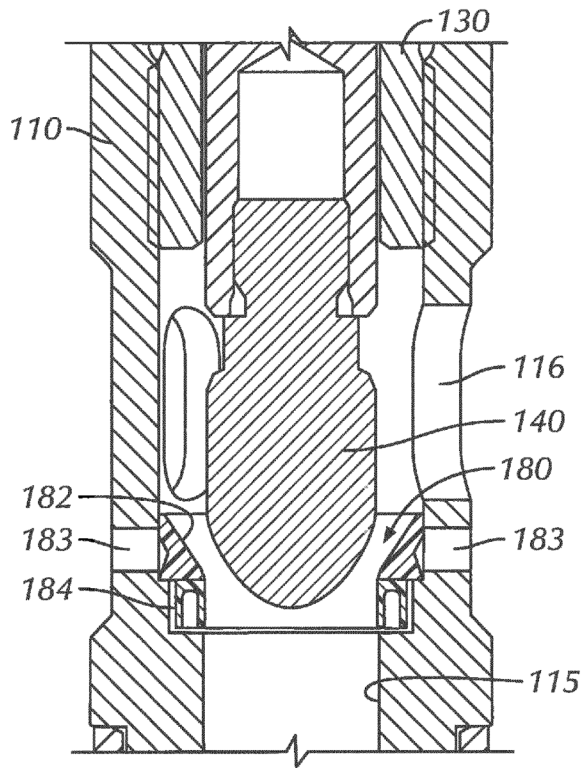


FIG. 7B

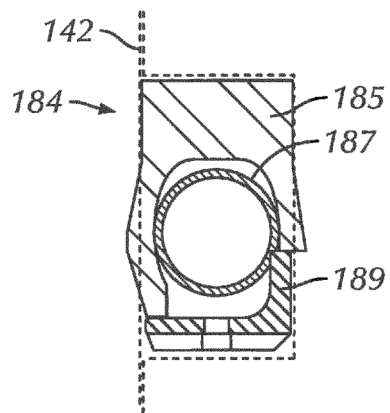


FIG. 7C

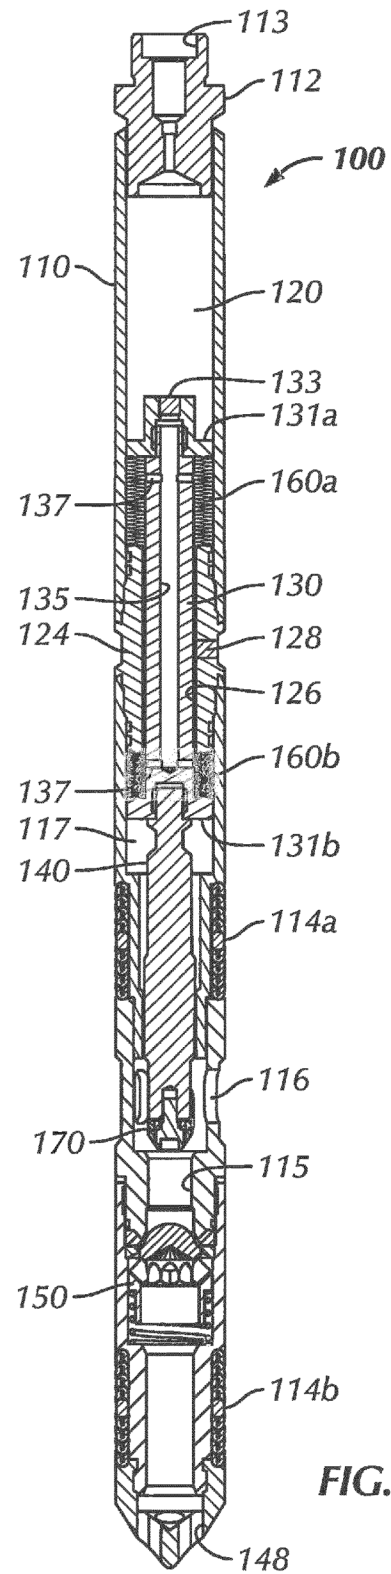


FIG. 8

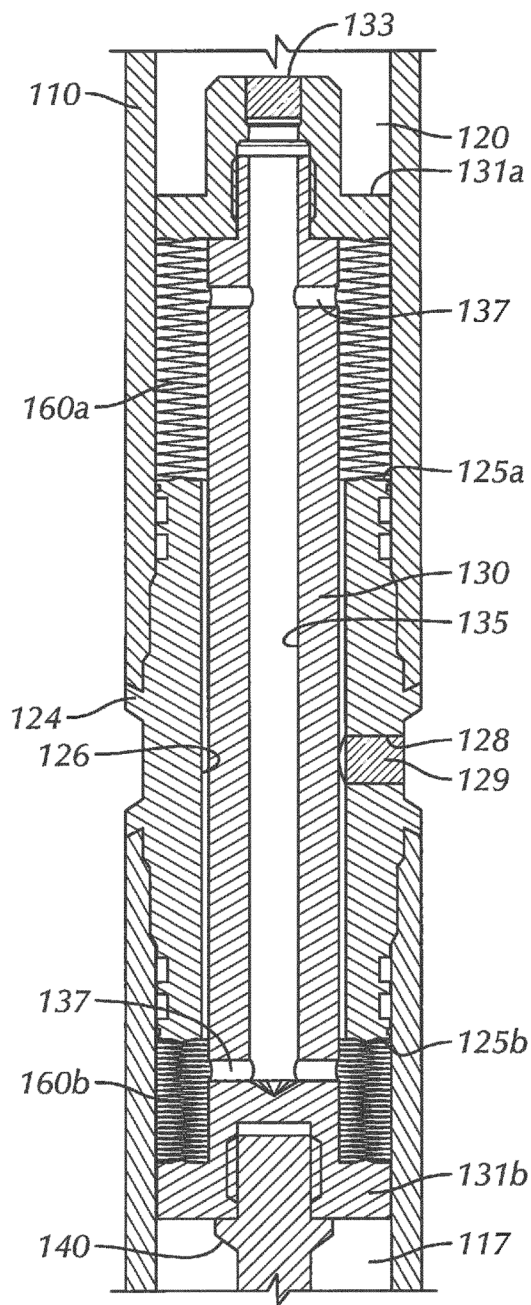


FIG. 9A

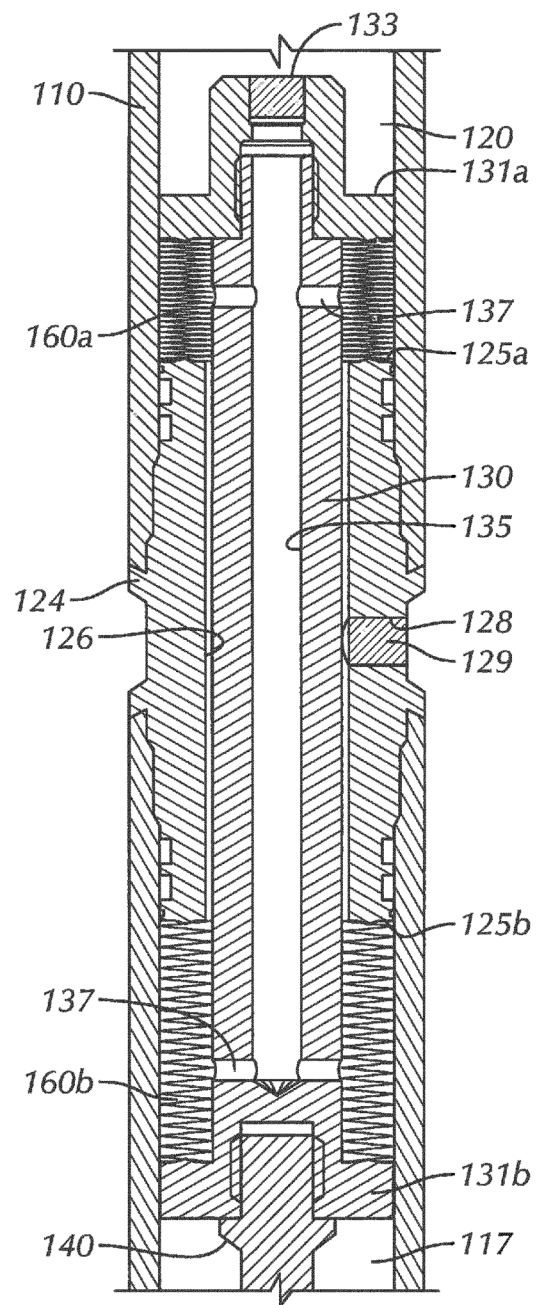


FIG. 9B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5662335 A [0014]
- US 5421241 A [0016]
- US 027676 A [0082]